
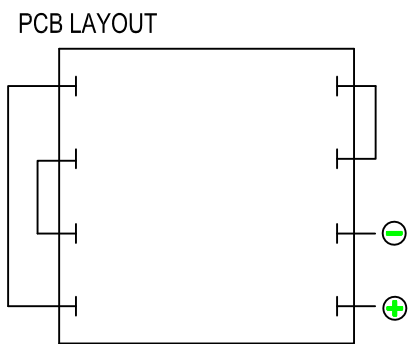



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	D	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

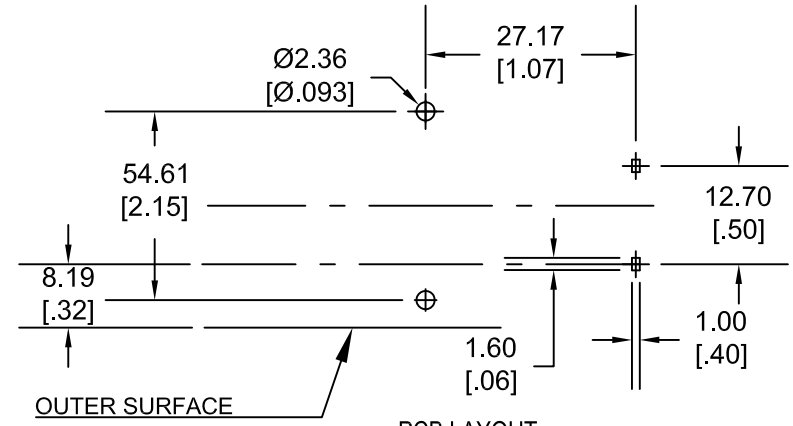

1. MATERIAL:
 HOUSING : IMPACT NYLON 6, UL94V-0, UL FILE NO. E48285
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: 302 STAINLESS STEEL, NICKEL PLATED.
 TEMPERATURE RANGE: -40°C TO +140°C
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional	Title		
±.8 (.030)	4AA BATTERY HOLDER WITH PC PINS		
Angular	Date	Drawing Number	
± 3°	10/17/14	BH4AA-PC	