


Surface Mount Type

Recommended Land Size (mm)



Size	X	Y	a
φ3	1.6	2.2	0.8
φ4	1.6	2.6	1.0
φ5	1.6	3.0	1.4
φ6.3	1.6	3.5	1.9
φ8×5.4L, φ8×6.2L	2.5	4.0	2.1
φ8 × 10L	2.5	3.5	3.0
φ10	2.5	4.0	4.0

Size	Welded terminal type			Perpendicularly mounted terminal type		
	X	Y	a	X	Y	a
φ12.5	4.0	7.5	7.0	2.0	7.3	3.0
φ16	6.0	8.5	9.5	2.0	7.9	5.3
φ18	6.0	9.5	10.5	2.0	8.9	5.3
φ20	6.0	9.5	12.5	2.4	8.7	7.8


※ A chip product of φ 12.5 or more in size and with a bent terminal shape indicates a product where the 11th digit of the product number code is "Q".

Vibration Resistance Type (UCZ, UCX, UUE, UBC)

① φ6.3 to 10

Size	X	Y	a
φ6.3 × 7.7L	3.0	4.0	1.6
φ6.3 × 10 L	3.0	4.0	1.6
φ8 × 10 L	4.3	5.3	2.0
φ10 × 10 L	4.3	5.6	3.3

② φ12.5 to 20




Size	A	B	C	D	E	F	G
φ12.5	3.0	2.3	5.0	7.3	7.0	2.0	2.5
φ16	5.3	2.9	5.0	7.9	7.0	2.0	2.5
φ18	5.3	3.1	5.8	8.9	11.0	2.0	4.5
φ20	7.8	2.9	5.8	8.7	12.0	2.4	4.8

Soldering by Reflow

Table-1

Chip Type Aluminum Electrolytic Capacitors

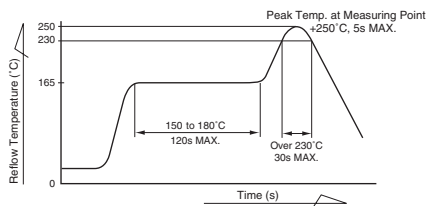

φ 10 or Smaller

(UZS, UZT, UWX^{*1}, UWR, UWP^{*1}, UWT^{*1}, UWF, UWG, UUP, UUT, UUA, UUL, UCB, UCW, UCD^{*2}, UCL, UCM, UCV, UUD, UUB^{*3}, UCJ, UCZ^{*2}, UCH, UCX^{*2}, UUR, UUX^{*3}, UUU, UUE^{*2}, UBC^{*2})

*1 φ 8×5.4L : Refer to the table-2


*2 φ 12.5 or greater : Refer to the table-4

*3 160 to 400V : Refer to the table-3

- Pre - heating shall be done at +150°C to 180°C and for 120 seconds.
- The temperature at capacitor Top shall not exceed +250°C.
- The duration for over +230°C temperature at capacitor surface shall not exceed 30 seconds.
- The standard temperature profile differs by every reflow method.
- Reflow shall be done within 2 cycles. please make sure the parts have enough cooling down time between the first and second soldering process.
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

Table-2

Chip Type Aluminum Electrolytic Capacitors

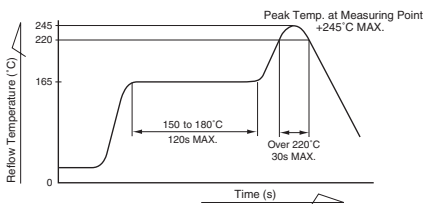


φ 8 × 5.4L (UWX, UWP, UWT)

- Pre - heating shall be done at +150°C to 180°C and for 120 seconds.
- The temperature at capacitor Top shall not exceed +245°C.
- The duration for over +220°C temperature at capacitor surface shall not exceed 30 seconds.
- The standard temperature profile differs by every reflow method.
- Reflow shall be done within 2 cycles. please make sure the parts have enough cooling down time between the first and second soldering process.
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

● Table-3

Chip Type Aluminum Electrolytic Capacitors

3.9L (UZR, UZG), UUX(160 to 400V), UUB(160 to 400V) , ULT, ULH, ULR, ULV

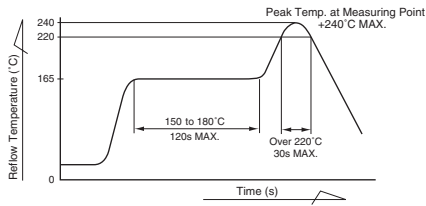


- Pre - heating shall be done at +150°C to 180°C and for 120 seconds.
- The temperature at capacitor Top shall not exceed +240°C.
- The duration for over +220°C temperature at capacitor surface shall not exceed 30 seconds.
- The standard temperature profile differs by every reflow method.
- Reflow shall be done within 2 cycles. please make sure the parts have enough cooling down time between the first and second soldering process.(φ 6.3 : 1 cycle only)
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

● Table-4

Chip Type Aluminum Electrolytic Capacitors

φ 12.5 or greater (UCD, UCX, UCZ, UUG, UUU, UUN, UUE, UBC)

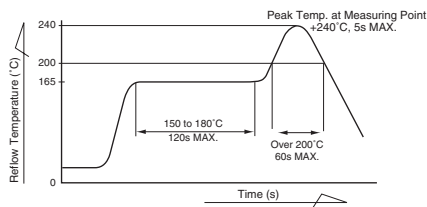


- Pre - heating shall be done at +150°C to 180°C and for 120 seconds.
- The temperature at capacitor Top shall not exceed +240°C.
- The duration for over +200°C temperature at capacitor surface shall not exceed 60 seconds.
- The standard temperature profile differs by every reflow method.
- Reflow shall be done within 2 cycles. please make sure the parts have enough cooling down time between the first and second soldering process.
- Please contact us if capacitors are subject to the conditions other than the allowable range at reflow.

● Table-5

Chip Type Aluminum Electrolytic Capacitors

(For High Temp. Reflow) UWJ, UWZ, UWD, UWH, UWS

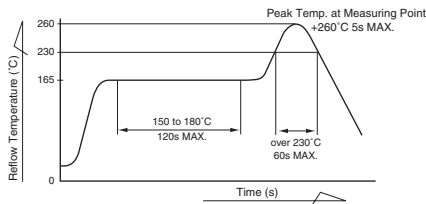

- Pre - heating shall be done at +150°C to 180°C and for 120 seconds.
- The temperature at capacitor surface shall not exceed +260°C.
- The duration for over +230°C temperature at capacitor surface shall not exceed 60 seconds.
- The standard temperature profile differs by every reflow method.
- Reflow shall be done within 2 cycles. please make sure the parts have enough cooling down time between the first and second soldering process. (φ 8 × 6.2 and φ 10 × 10 : 1 cycle only)
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.